




Range	Linnea
Desk Style	Double Bench with Shared Inset Leg
 Please Read This Leaflet Before Assembly	 2 Person Assembly
	Assembly Instructions



Doc. issued: 09/2018

Tools Required



Pozi Screwdriver





5mm Allen Key or Hex' Screwdriver




Components

A A	Desktop Panels	x 2
B	Leg Frames	x 2
C	Shared Inset Leg Frame	x 1
D D	Top Rails	x 4
E E	Arms	x 3/4
F F	Double Bench Cable Tray	x 1
G	Leg Frame Bolts (M8x16)	x 16
H	Shared Leg Frame Bolts (M8x16)	x 16
J J	Top Rail Bolts (M6x20)	x 12
K K	Slider Screws (30mm Confirmat)	x 12
L L	Sliders	x 12
M	Screen Brackets	x 2
N	Screen Bracket Screws	x 2
P	Screen	x 1

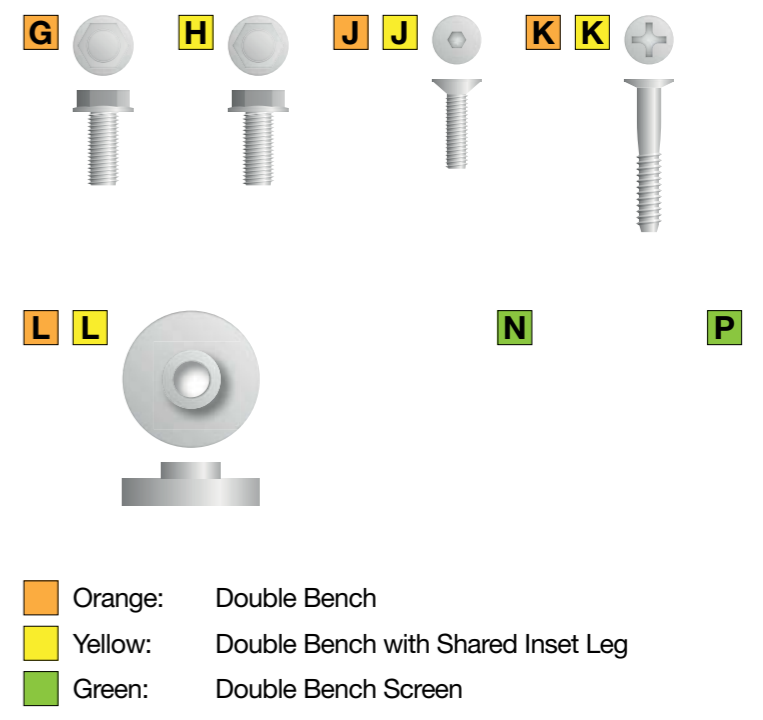


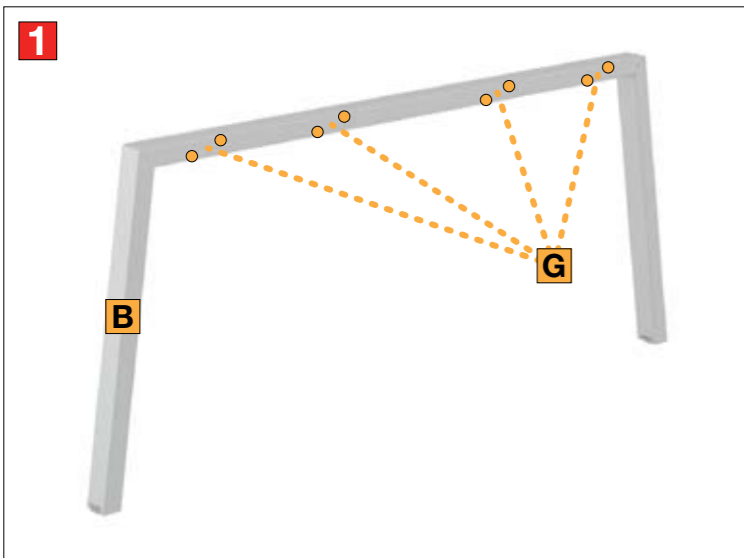


1. Half insert 8x Leg Frame Bolts 'G' into each Leg Frame 'B' (16x in total) at position 'Z' leaving a 5mm gap for the Top Rail to be inserted.

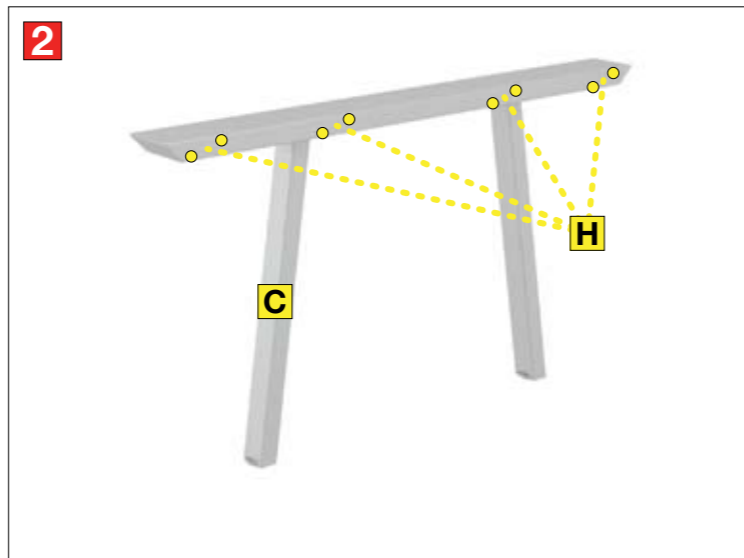


2. If using a Double Bench with Shared Inset Leg, half insert 16x Shared Leg Frame Bolts 'H' into the Shared Inset Leg Frame 'C' at position 'Z' leaving a 5mm gap for the Top Rail to be inserted.

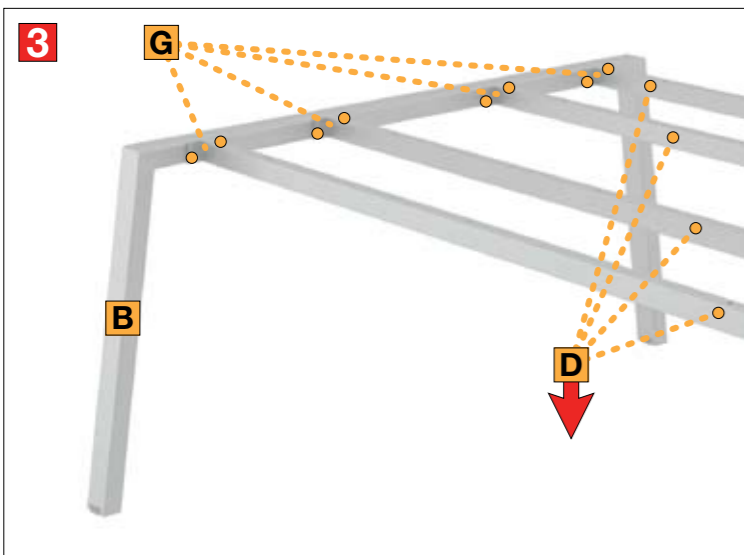


3. Place the Top Rails 'D' on top of the half inserted Leg Frame Bolts 'G' and fully tighten.

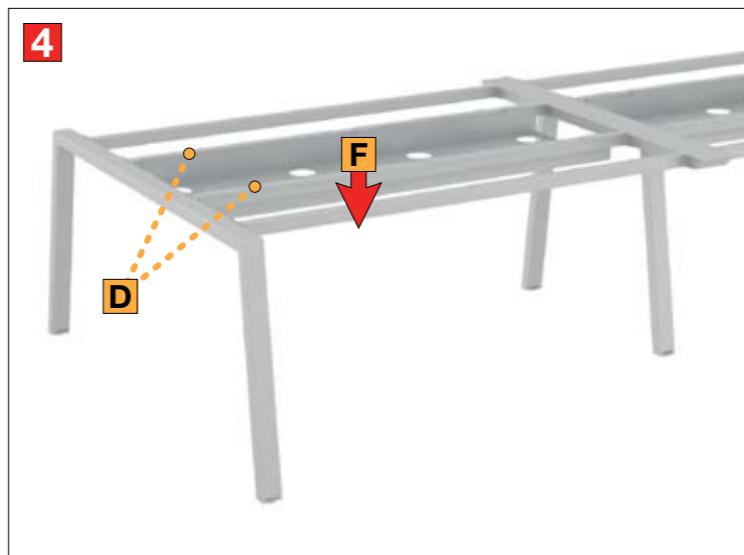


4. At this point place the Double Bench Cable Tray 'F' between the middle 2 Top Rails 'D'. This is not retro fittable and cannot be placed once the Desktop is in place.

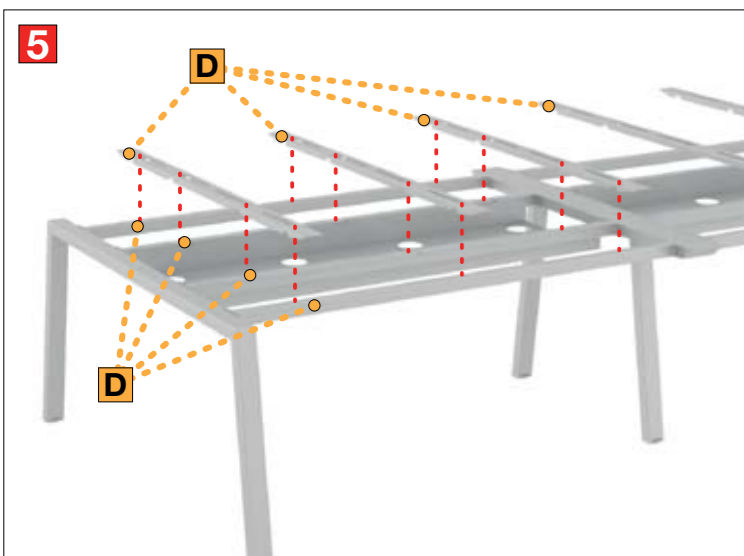


5. Place Arms 'E' along the Top Rails 'D' over the pre-drilled holes and fix together using the Top Rail Bolts 'J'.

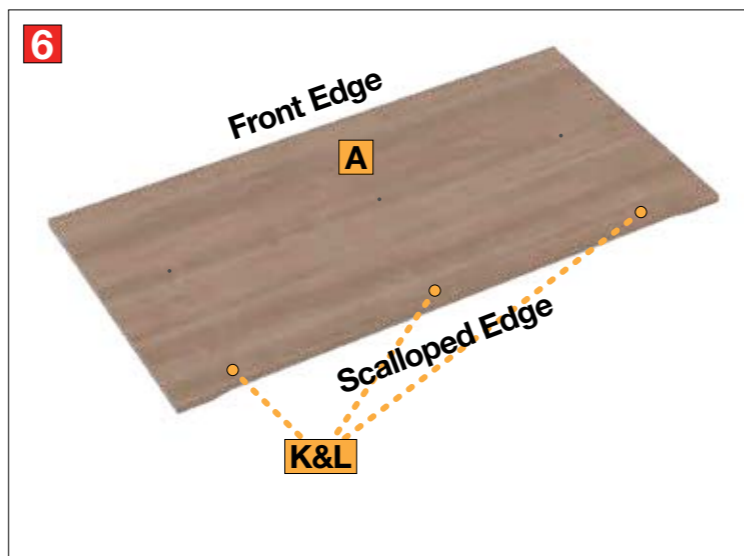


6. Place Desktop 'A' on a flat surface and attach 3x Sliders 'L' to the scalloped end of the Desktop using 3x Slider Screws 'K'.

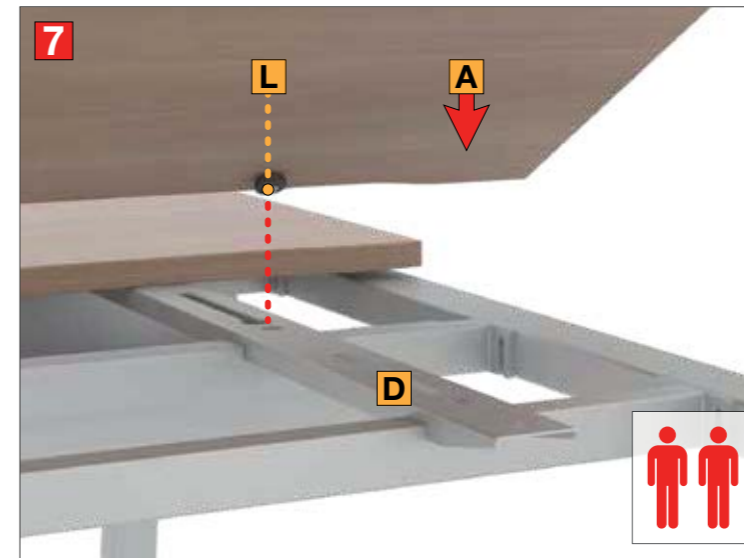


7. With assistance, turn Desktop 'A' and place it over the Arms 'D' so the 3x Sliders 'L' align with the apertures within the Arms 'E'.

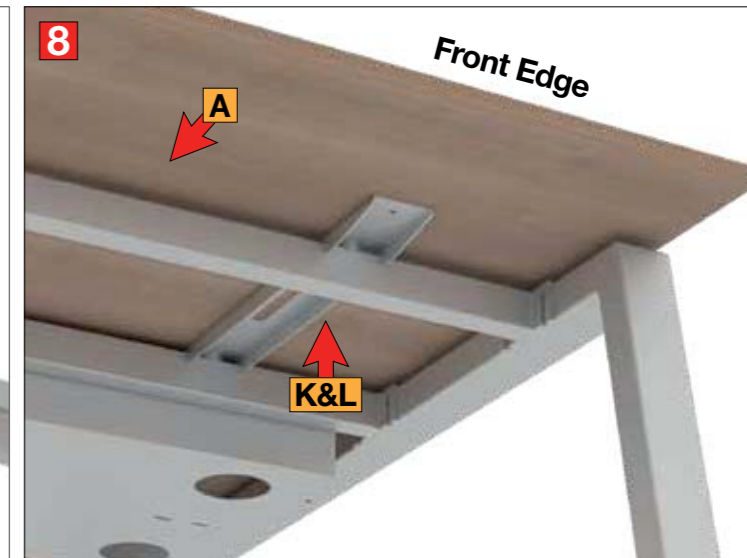

8. Push Desktop 'A' towards the centre of the assembled frame and attach 3x Sliders 'L' near the front edge of Desktop using 3x Slider Screws 'K'. The Linnea Double Bench is now complete.

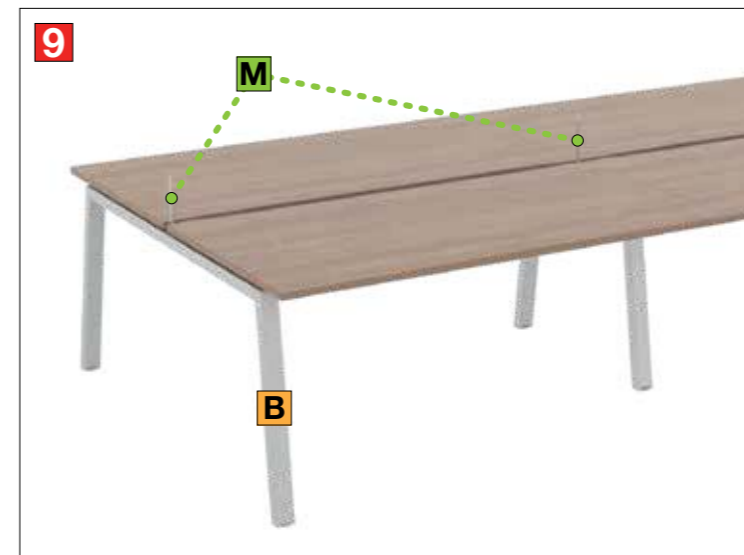

9. If using a Double Bench Screen, attach Screen Bracket 'M' to the topside of Leg Frame 'B' using Screen Bracket Bolt 'N'.

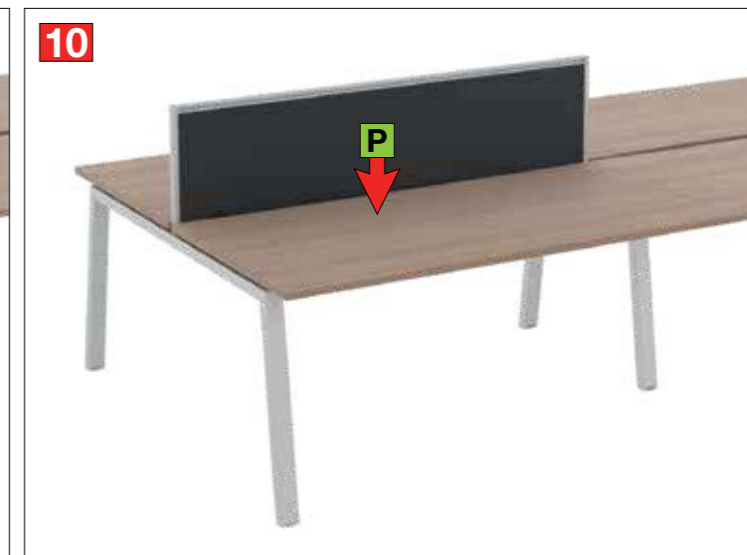

10. Align Screen 'Q' to the Screen Brackets 'M' and connect together so the Screen 'P' touches the Leg Frame 'C'.